



# Доставка останньої милі: Рефрижератор







Пиво

Оптимальна температура :

1 ~ 4°C





Свіжі напої (сок, молоко)

Оптимальна температура: 0-5 °C





Свіжі овочі та фрукти

Оптимальна температура:

-1 ~+1 °C





Морепродукти, риба

Оптимальна температура:

-10~-7 °C





Вакцини, сировотки,  
медикаменти

Оптимальна температура: - 5-2°C  
(Для спеціальних вакцин може  
бути налагоджено на 18 ~ - 20 °C)





Розумний контроль  
температури

Доставка холодних  
продуктів у реальному часі



Range:70Km ( Half laod )



Charging time:6-8hrs







**CERTIFICATE OF COMPLIANCE**

ENTE CERTIFICAZIONE MACCHINE

CERTIFICATE No. T120313/XHR204

MANUFACTURER:	
NAME	
ADDRESS	
WE CERTIFY THE FOLLOWING PRODUCT(S):	
PRODUCT	TRANSPORT REFRIGERATION UNITS
MODEL/S	C120 C200 T110 T110F T230 T230F T110D F150 F300 F450 F450S F600 F600S F800 F800S F960 TR750 TR950 TR2000
YEAR	2012

**REMARK:**  
THIS DOCUMENT HAS BEEN ISSUED UPON A REVIEW OF THE DATASHEETS AND OF THE TECHNICAL CONSTRUCTION FILE. THE APPARATUS IS CONSIDERED TO MEET THE REQUIREMENTS OF THE BELOW STANDARDS, THEREFORE TO FULFIL THE REQUIREMENTS OF THE BELOW LISTED DIRECTIVES:

2006/42/EC	MACHINERY DIRECTIVE
2006/95/EC	LOW VOLTAGE DIRECTIVE
2004/108/EC	ELECTROMAGNETIC COMPATIBILITY DIRECTIVE

**SAFETY STANDARDS EN NORMS:**  
EN ISO 12100:2010, EN 60204-1:2006+A1:2009, EN 60335-1+A14:2010, EN 60335-2-40:2003+A2:2009, EN 55011:2009+A1:2010, EN 13309:2010, EN 61000-5-2:2005


THIS DOCUMENT IS ONLY VALID FOR THE EQUIPMENT AND CONFIGURATION DESCRIBED AND IN CONJUNCTION WITH THE TEST DATA DETAILED ABOVE. NEVERTHELESS THE MANUFACTURER IS NOT EXEMPTED TO PERFORM ALL THE NECESSARY ACTIVITIES BEFORE ISSUING THE DECLARATION OF CONFORMITY. IN CASE THE APPLIANCE IS MODIFIED OR THE APPLIANCE WILL BE EQUIPPED WITH ACCESSORIES NOT SPECIFIED IN THE MANUFACTURER OPERATOR MANUAL, IT IS RECOMMENDED TO GET IN TOUCH WITH ENTE CERTIFICAZIONE MACCHINE FOR EC VALIDITY EXTENSION.

DATE OF ISSUE MARCH 2012


AREA MANAGER LUCA BIGNARDI		GENERAL MANAGER ANTONIO JECOVINI
-------------------------------	--	-------------------------------------

**ENTE CERTIFICAZIONE MACCHINE S.R.L.**  
VIALE DELL'INDUSTRIA 108 - 40138 BOLOGNA (BO) - ITALY  
+39 059 763736 +39 059 765305 +39 059 761838 | info@entecert.it | www.entecert.it



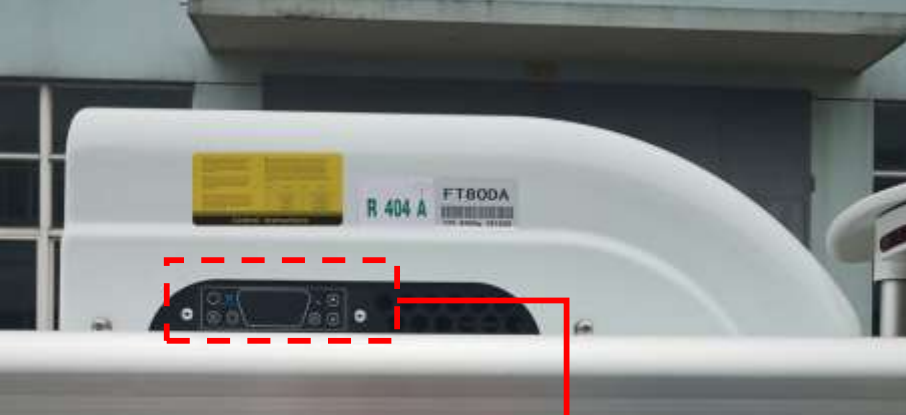


Розумна панель управління



180 ~ 240В максимальна напруга



**F**  $\leq 186\text{N}$   
( 18.9Кг )

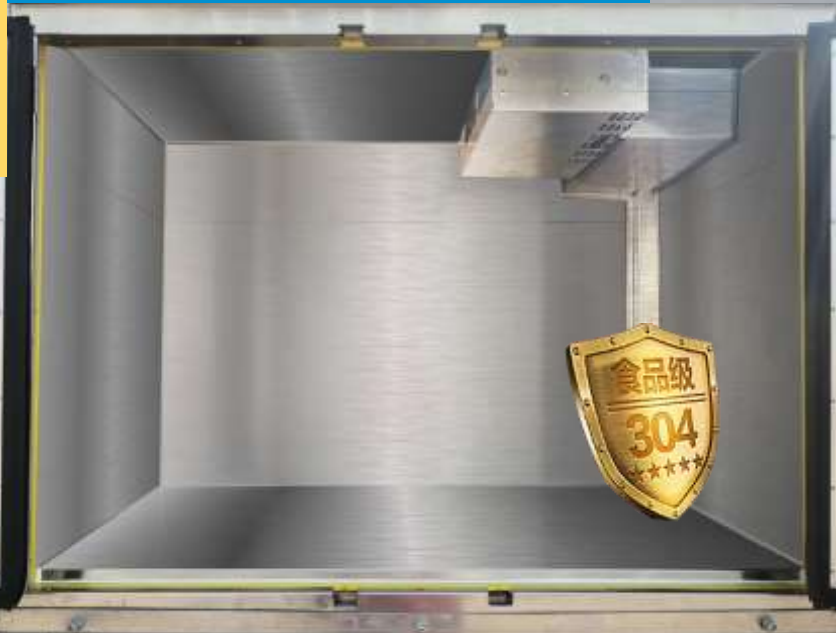

-18°C ( TA 32°C ) ;  
-23°C ( TA 12°C )



Розумне розмороження






**Smart temperature control**  
**Real time cold chain**



Test item (Half load, 75kg)	Range ( To SOC10% )	Range ( To SOC5% )	Test ambient temperature
-18°C~-15°C	55KM	61KM	16°C
-10°C~-7°C	63KM	69KM	11°C
0°C~4°C	68KM	73kM	12°C
7°C~10°C	64KM	71KM	9°C
Test item (Full load, 150kg)	Range ( To SOC10% )	Range ( To SOC5% )	Test ambient temperature
-18°C~-15°C	58KM	62km	11°C
-10°C~-7°C	63KM	67KM	19°C
0°C~4°C	64KM	69KM	17°C
7°C~10°C	67KM	73KM	24°C

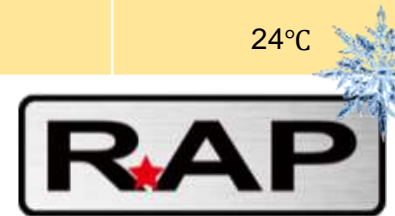



## Smart temperature control Real time cold chain



Box outline size	1382mm*940mm*1000mm	
Vehicle height after loading box	1830mm	
Refrigerated box capacity	905L	
Box opening mode	Right side	
Box opening force	≤186N	
Compressor installed position	Inner and outer roof top	Split type
Lowest refrigeration temperature	-18°C ( TA 32°C ) ; -23°C ( TA 12°C )	
Refrigeration speed	1、 The empty box is cooled for 6 minutes, the central area of box temperature is cooled to 0°C±1°C	TA 12°C
	2、 The empty box is cooled for 23 minutes, the central area of box temperature is cooled to -18°C±1°C	TA 12°C
Rated compressor power	850W	
Power type	72V on-board	220V External power supply
Compressor noise	≤60dB	1 meter at 45 ° behind the compressor
Inside material of box	304 Stainless steel	
Total thermal conductivity coefficient of box	≤0.3W/m².k	
Air leakage coefficient of box	≤6.3/h	





**RAP**



**Розумний контроль  
температури  
Доставка холодних  
продуктів у реальному  
часі**